


VIDEOSERVICES


professional audio/video specialist

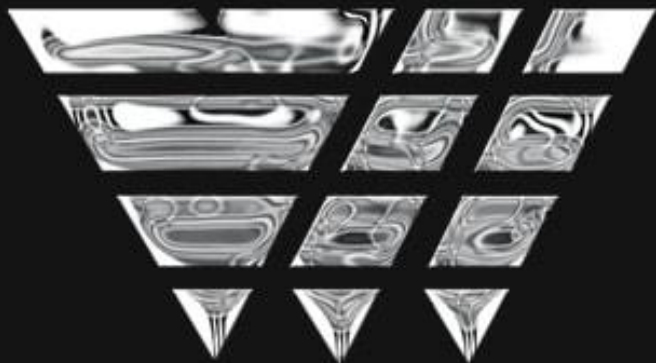

      /videoservicios

 www.videoservicesint.com

FLUOTEC®

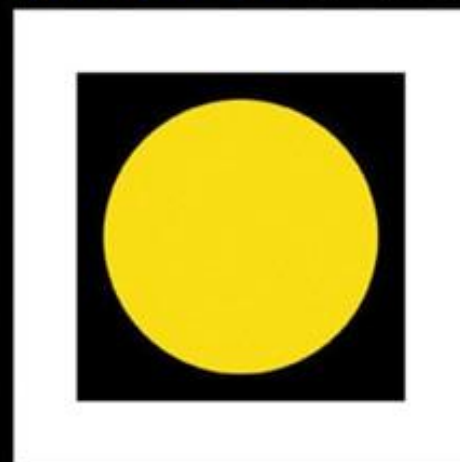

...**WE LIGHT!**

      /fluotec

 www.fluotec.net

ABOUT



Videoservicios is a company with over 35 years of experience in the video and audio equipment sales industry. We are dedicated to provide video and audio integration services for video production and media management.

We are also authorized dealers for Sony Professional, Libec, Canon, Zeiss, Broadcast Pix, Kramer and FluoTec among other big brands.

In this occasion we want to introduce to our future clients the newest professional production lights from **FluoTec**.

ABOUT



FluoTec is a leading manufacturer of LED and professional lighting fixtures for television studios, motion pictures, video and photography for over 20 years. FluoTec Studio Lights, Soft Lights, and Location Lights includes: Spot Lights, FRESNELS & StudioLED PANELS that deliver powerful and beautiful light that bring try-dimensional atmosphere to the scenes and images, either in photography, television, and motion picture production.

FluTec has created an innovated technology called THE NEBULA TECHNOLOGY unique to FluoTec StudioLED Pannels that emits powerful high quality, full spectrum white light beams. This produces even light, well-defined shadows, desirable skin tones and accurate, vibrant stage & costumes color rendition.

Awards & Nominations

The commitment and energy of those who work at **FLUOTEC®** can be summed up in obtaining the following prizes and nominations:



WINNER National Association of Broadcasters

Editor's Pick the Show.
For advancement in
The Art and Science of
Television Broadcast.

Product developed in conjunction with
Lowel Light Manufacturing Inc.

2000



FINALIST National Association of Broadcasters

Best of Show.
Digital Video Professionals
Association

2001

2004



WINNER Studio Daily Prime Awards

Winner.
Production.

2011

2015

WINNER National Association of Broadcasters

Editor's Pick the Show.
For achivement in the
advance of The Art
and Science of Television
Broadcast.

Product developed in conjunction with
Lowel Light Manufacturing Inc.



WINNER National Association of Broadcasters

Best of NAB 2011.
Best Lighting Gear Award.



2016

FINALIST
Lucie Technical Awards

The Best Continuous Light Source Finalist.




FINALIST
Studio Daily Prime Awards

The top five of new technology, creative thinking and high-end craftsmanship in media and entertainment.



2017

FINALIST
Studio Daily Prime Awards



FINALIST
Studio Daily Prime Awards



NOMINEE
Society of Camera Operators



NOMINEE
Society of Camera Operators



WINNER
Broadcast Beat



WINNER
New Bay TV Technology



WINNER
Cine Gear Expo Technical Awards



WINNER
New Bay BOOTH DESIGN

Best of Show.
For their creative design, product display, and customer flow and accessibility.

NAB
Best of Show Digital Video



2018

WINNER
Produ Awards TECHNOLOGIA



NOMINEE
Product of the year NAS SHOW



2019



Luminaires and lighting fixtures for television studios, movie theaters and forums, newsrooms, video production studios, churches and places of worship and government facilities.

AuraLux100®

Daylight 5.5" StudioLED Fresnel Manual Zoom

- **Daylight**
- **5600 K**
- **5.5" Lens**
- **103W**
- **0.86 A @120 VAC**
- **13.29 lb**
- **DMX Dimmable Digital Control: 0%-100%**
- **Quiet operation**
- **Stepless CCT & Dimming Technology**
- **Code: G6LED172**



AuraLux100®

Daylight 5.5" StudioLED Fresnel Manual Zoom

Photometric Data:

Spot: 9°
26,806 lx (2,490 fc) @ 6 ft

Flood: 42°
2,435 lx (226 fc) @ 6 ft



AuraLux100®

Tungsten 5.5" StudioLED Fresnel Manual Zoom

- **Tungsten**
- **3200K**
- **5.5" Lens**
- **103W**
- **0.86 A @120 VAC**
- **13.29 lb**
- **DMX Dimmable Digital Control: 0%-100%**
- **Quiet operation**
- **Stepless CCT & Dimming Technology**
- **Code: G6LED171**



AuraLux100®

Tungsten 5.5" StudioLED Fresnel Manual Zoom

Photometric Data:

Spot: 9°
27,600 lx (2,564 fc) @ 6 ft

Flood: 42°
2,500 lx (232 fc) @ 6 ft



VegaLux200® HP

High-Performance Daylight 7" StudioLED Fresnel Motorized Zoom

- Daylight
- 5700K
- 7" Lens
- 197W
- 1.64 A @120 VAC
- 15.43 lb
- DMX Dimmable Digital Control: 0%-100%
- Quiet operation
- Stepless CCT & Dimming Technology
- Code: G6LED174



VegaLux200® HP

High-Performance Daylight 7" StudioLED Fresnel Motorized Zoom

Photometric Data:

Spot: 13°

41,300 lx (3,837 fc) @ 6 ft

Flood: 58°

3,676 lx (342 fc) @ 6 ft



VegaLux200® HP

High-Performance Tungsten 7" StudioLED Fresnel Motorized Zoom

- Tungsten
- 3100K
- 7" Lens
- 197W
- 1.64 A @120 VAC
- 15.43 lb
- DMX Dimmable Digital Control: 0%-100%
- Quiet operation
- Stepless CCT & Dimming Technology
- Code: G6LED173



VegaLux200® HP

High-Performance Tungsten 7" **StudioLED** Fresnel Motorized Zoom

Photometric Data:

Spot: 13°

42,254 lx (3,925 fc) @ 6 ft

Flood: 57°

3,271 lx (304 fc) @ 6 ft



VegaLux200® UHP

Ultra High-Performance Daylight 8" **StudioLED** Fresnel Motorized Zoom

- **Daylight**
- **5700K**
- **8" Premium Glass Lens**
- **197W**
- **1.64 A @120 VAC**
- **15.87 lb**
- **DMX Dimmable Digital Control: 0%-100%**
- **Quiet operation**
- **Stepless CCT & Dimming Technology**
- **Code: G6LED176**



VegaLux200® UHP

Ultra High-Performance Daylight 8" **StudioLED** Fresnel Motorized Zoom

Photometric Data:

Spot: 13°
37,362 lx (3,471 fc) @ 6 ft

Flood: 54°
4,727 lx (439 fc) @ 6 ft



VegaLux200® UHP

Ultra High-Performance Tungsten 8" **StudioLED** Fresnel Motorized Zoom

- **Tungsten**
- **3100K**
- **8" Premium Glass Lens**
- **197W**
- **1.64 A @120 VAC**
- **15.87 lb**
- **DMX Dimmable Digital Control: 0%-100%**
- **Quiet operation**
- **Stepless CCT & Dimming Technology**
- **Code: G6LED175**



VegaLux200® UHP

Ultra High-Performance Tungsten 8" **StudioLED** Fresnel Motorized Zoom

Photometric Data:

Spot: 12°

34,088 lx (3,167 fc) @ 6 ft

Flood: 52°

4,243 lx (394 fc) @ 6 ft



VegaLux300®

Tunable 10" StudioLED Fresnel Motorized Zoom

- **Tunable**
- **3000K - 5800K**
- **10" Micro Prism Lens**
- **338W**
- **2.81 A @120 VAC**
- **26.23 lb**
- **DMX Dimmable Digital Control: 0%-100%**
- **Quiet operation**
- **Stepless CCT & Dimming Technology**
- **Code: G6LED126**



VegaLux300®

Tunable 10" StudioLED Fresnel Motorized Zoom

Photometric Data:

Spot: 15°
22,620 lx (2,101 fc) @ 6 ft

Flood: 50°
3,262 lx (303 fc) @ 6 ft



VegaLux300®

Daylight 10" StudioLED Fresnel Motorized Zoom

- **Daylight**
- **5700K**
- **10" Premium Glass Lens**
- **197W**
- **1.64 A @120 VAC**
- **26.23 lb**
- **DMX Dimmable Digital Control: 0%-100%**
- **Quiet operation**
- **Stepless CCT & Dimming Technology**
- **Code: G6LED178**



VegaLux300®

Daylight 10" **StudioLED** Fresnel Motorized Zoom

Photometric Data:

Spot: 10°

46,474 lx (4,318 fc) @ 6 ft

Flood: 47°

5,644 lx (524 fc) @ 6 ft



VegaLux300®

Tungsten 10" StudioLED Fresnel Motorized Zoom

- **Tungsten**
- **3100K**
- **10" Premium Glass Lens**
- **197W**
- **1.64 A @120 VAC**
- **26.23 lb**
- **DMX Dimmable Digital Control: 0%-100%**
- **Quiet operation**
- **Stepless CCT & Dimming Technology**
- **Code: G6LED177**



VegaLux300®

Tungsten 10" **StudioLED** Fresnel Motorized Zoom

Photometric Data:

Spot: 10°

41,300 lx (3,837 fc) @ 6 ft

Flood: 47°

4,910 lx (456 fc) @ 6 ft



StudioLED 650[®] HP

High-Performance Tunable DMX **StudioLED** PANELS

- **Tunable**
- **2700K - 6200K**
- **163W**
- **1.3 A @120 VAC**
- **17.85 lb**
- **3 Channel DMX Dimmable: 0%-100%**
- **Stepless CCT & Dimming Technology**
- **Code: G6LED203**



StudioLED 650[®] HP

High-Performance Tunable DMX **StudioLED** PANELS

Photometric Data:

Dispersion Angle: 48°

2,846 lx (264 fc) @ 6 ft

1,269 lx (118 fc) @ 9 ft

711 lx (66 fc) @ 12 ft



StudioLED 650[®] HP

High-Performance Daylight DMX StudioLED PANELS

- **Daylight**
- **6200K**
- **163W**
- **1.3 A @120 VAC**
- **17.85 lb**
- **2 Channel DMX Dimmable: 0%-100%**
- **Stepless CCT & Dimming Technology**
- **Code: G6LED209**



StudioLED 650[®] HP

High-Performance Daylight DMX StudioLED PANELS

Photometric Data:

Dispersion Angle: 43°

1,541 lx (143 fc) @ 6 ft

687 lx (64 fc) @ 9 ft

385 lx (36 fc) @ 12 ft



StudioLED 650[®] HP

High-Performance Tungsten DMX StudioLED PANELS

- **Tungsten**
- **2700K**
- **163W**
- **1.3 A @120 VAC**
- **17.85 lb**
- **2 Channel DMX Dimmable: 0%-100%**
- **Stepless CCT & Dimming Technology**
- **Code: G6LED206**



StudioLED 650[®] HP

High-Performance Tungsten DMX **StudioLED** PANELS

Photometric Data:

Dispersion Angle: 43°

1,444 lx (134 fc) @ 6 ft

644 lx (60 fc) @ 9 ft

361 lx (34 fc) @ 12 ft



StudioLED 450[®] HP

High-Performance Tunable DMX **StudioLED** PANELS

- **Tunable**
- **2700K - 6200K**
- **110W**
- **0.94 A @120 VAC**
- **14.33 lb**
- **3 Channel DMX Dimmable: 0%-100%**
- **Stepless CCT & Dimming Technology**
- **Code: G6LED202**



StudioLED 450[®] HP

High-Performance Tunable DMX **StudioLED** PANELS

Photometric Data:

Dispersion Angle: 45°

1,920 lx (178 fc) @ 6 ft

856 lx (80 fc) @ 9 ft

480 lx (45 fc) @ 12 ft



StudioLED 450[®] HP

High-Performance Daylight DMX StudioLED PANELS

- **Daylight**
- **6200K**
- **110W**
- **0.94 A @120 VAC**
- **14.33 lb**
- **2 Channel DMX Dimmable: 0%-100%**
- **Stepless CCT & Dimming Technology**
- **Code: G6LED208**



StudioLED 450[®] HP

High-Performance Daylight DMX StudioLED PANELS

Photometric Data:

Dispersion Angle: 45°

1,040 lx (97 fc) @ 6 ft

464 lx (43 fc) @ 9 ft

260 lx (24 fc) @ 12 ft



StudioLED 450[®] HP

High-Performance Tungsten DMX **StudioLED** PANELS

- **Tungsten**
- **2700K**
- **110W**
- **0.94 A @120 VAC**
- **14.33 lb**
- **2 Channel DMX Dimmable: 0%-100%**
- **Stepless CCT & Dimming Technology**
- **Code: G6LED205**



StudioLED 450[®] HP

High-Performance Tungsten DMX **StudioLED** PANELS

Photometric Data:

Dispersion Angle: 45°

975 lx (91 fc) @ 6 ft

435 lx (40 fc) @ 9 ft

244 lx (23 fc) @ 12 ft



StudioLED 250[®] HP

High-Performance Tunable DMX **StudioLED** PANELS

- **Tunable**
- **2700K - 6200K**
- **66W**
- **0.56 A @120 VAC**
- **10.36 lb**
- **3 Channel DMX Dimmable: 0%-100%**
- **Stepless CCT & Dimming Technology**
- **Code: G6LED201**



StudioLED 250[®] HP

High-Performance Tunable DMX **StudioLED** PANELS

Photometric Data:

Dispersion Angle: 45°

1,360 lx (126 fc) @ 6 ft

607 lx (56 fc) @ 9 ft

340 lx (32 fc) @ 12 ft



StudioLED 250[®] HP

High-Performance Daylight DMX StudioLED PANELS

- **Daylight**
- **6200K**
- **66W**
- **0.56 A @120 VAC**
- **10.36 lb**
- **2 Channel DMX Dimmable: 0%-100%**
- **Stepless CCT & Dimming Technology**
- **Code: G6LED207**



StudioLED 250[®] HP

High-Performance Daylight DMX StudioLED PANELS

Photometric Data:

Dispersion Angle: 45°

734 lx (68 fc) @ 6 ft

327 lx (30 fc) @ 9 ft

184 lx (17 fc) @ 12 ft



StudioLED 250[®] HP

High-Performance Tungsten DMX StudioLED PANELS

- **Tungsten**
- **2700K**
- **66W**
- **0.56 A @120 VAC**
- **10.36 lb**
- **2 Channel DMX Dimmable: 0%-100%**
- **Stepless CCT & Dimming Technology**
- **Code: G6LED204**



StudioLED 250[®] HP

High-Performance Tungsten DMX **StudioLED** PANELS

Photometric Data:

Dispersion Angle: 45°

683 lx (63 fc) @ 6 ft

305 lx (28 fc) @ 9 ft

171 lx (16 fc) @ 12 ft



Diffusion

for **StudioLED** PANELS®

- *The powerful and practical solution for soft lights*
- *with NEBULA® Diffusion Technology*
- *light control accessories for **StudioLED** PANELS®*


- Diffusion for **StudioLED** 650® HP: G6LED222
- Diffusion for **StudioLED** 450® HP: G6LED221
- Diffusion for **StudioLED** 250® HP: G6LED220



CineLight 480 **Super Quad.**

Tunable Interchangeable Diffusion Long Throw LED PANEL

- **Tunable**
- **2600 K - 6100 K**
- **835 W**
- **7.03 A @120 VAC**
- **25.35 lb**
- **Constant Output Pure White Light**
- **Digital Dimmer 0%-100%**
- **Stepless CCT & Dimming Technology**
- **Code with Yoke: G6LCNT220**

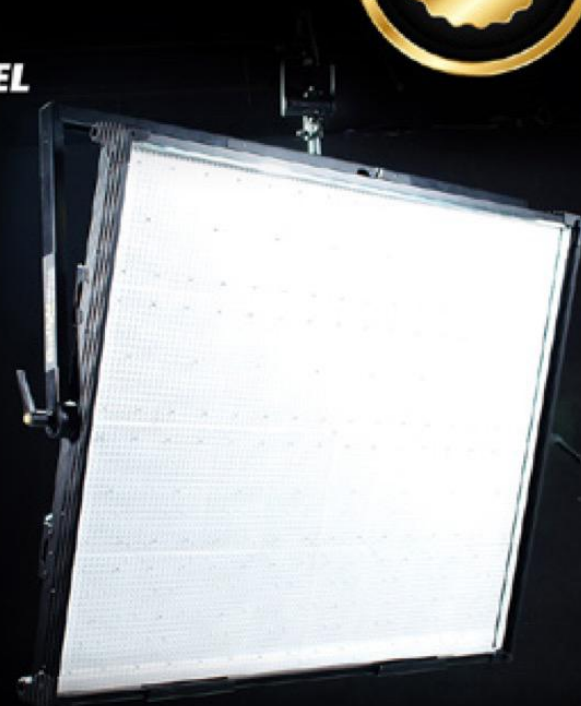

CineLight 480 **Super Quad.**

Tunable Interchangeable Diffusion Long Throw LED PANEL

Photometric Data:

Without Interchangeable Diffusion Panel

Dispersion Angle X: 46°

19,469 lx (1,809 fc) @ 6 ft

With Interchangeable Diffusion Panel

Dispersion Angle X: 69°

5,560 lx (517 fc) @ 6 ft



CineLight Studio 120 Quad®



Tunable Interchangeable Diffusion Long Throw LED PANEL

- **Tunable**
- **2700K - 6600K**
- **213W**
- **1.79 A @120 VAC**
- **25.35 lb**
- **Constant Output Pure White Light**
- **Digital Dimmer 0%-100%**
- **Stepless CCT & Dimming Technology**
- **Code with Yoke: G6LCNT113**
- **Code with Stand Mounting Bracket: G6LCNT115**



CineLight Studio 120 Quad[®]



Tunable Interchangeable Diffusion Long Throw LED PANEL

Photometric Data:

Without Interchangeable Diffusion Panel

Dispersion Angle X: 45°

3,887 lx (361 fc) @ 6 ft

With Interchangeable Diffusion Panel

Dispersion Angle X: 70°

1,500 lx (139 fc) @ 6 ft



CineLight Studio 120 Quad[®]



Tunable Interchangeable Diffusion Long Throw LED PANEL with Yoke

Includes:

- **Flightcase with handle and wheels**
- **Interchangeable Diffusion Panel**
- **Gel frame**
- **C-Clamp**
- **Safety cable**
- **16 ft long Powercon AC cable without switch**
- **Stand mounting spigot 5/8"**
- **G6LCNT203**



CineLight Studio 120 Quad[®]



Tunable Interchangeable Diffusion Long Throw LED PANEL with Stand Mounting Bracket

Includes:

- **Flightcase with handle and wheels**
- **Gel frame**
- **Stand Mounting Bracket**
- **16 ft long Powercon AC cable**
- **G6LCNT205**



CineLight **Studio 120**®

Tunable Interchangeable Diffusion Long Throw LED PANEL

- **Tunable**
- **2700K - 6600K**
- **213W 90-240V**
- **21.5 lb**
- **DMX Dimmable**
- **Digital Dimmer 0%-100%**
- **Stepless CCT & Dimming Technology**
- **Code with Yoke: G6LCNT105**
- **Code with Stand Mounting Bracket: G6LCNT129**



CineLight Studio 120[®]

Tunable Interchangeable Diffusion Long Throw LED PANEL

Photometric Data:

Without Interchangeable Diffusion Panel

Dispersion Angle X: 45°

3,887 lx (361 fc) @ 6 ft

With Interchangeable Diffusion Panel

Dispersion Angle X: 70°

1,500 lx (139 fc) @ 6 ft



CineLight Studio 120®



Tunable Interchangeable Diffusion Long Throw LED PANEL with Yoke

Includes:

- **Flightcase with handle and wheels (Dims.: 141.3 x 40.3 x 29.5 cm)**
- **Interchangeable Diffusion Panel**
- **Barndoor**
- **Gel frame**
- **C-Clamp**
- **Safety cable**
- **16 ft long Powercon AC cable without switch**
- **Stand mounting spigot 5/8"**
- **G6LCNT204**



CineLight Studio 120®



Tunable Interchangeable Diffusion Long Throw LED PANEL with Stand Mounting Bracket

Includes:

- **Flightcase with handle and wheels (Dims.: 141.3 x 40.3 x 29.5 cm)**
- **Barndoor**
- **Gel frame**
- **Stand Mounting Bracket**
- **16 ft long Powercon AC cable**
- **G6LCNT206**



CineLight **Studio 60**®

Tunable Interchangeable Diffusion Long Throw LED PANEL

- **Tunable**
- **2700K - 6600K**
- **109W**
- **0.91 A @120 VAC**
- **15.43 lb**
- **Constant Output Pure White Light**
- **Digital Dimmer 0%-100%**
- **Stepless CCT & Dimming Technology**
- **Code with Yoke: G6LCNT106**
- **Code with Stand Mounting Bracket: G6LCNT130**



CineLight Studio 60[®]

Tunable Interchangeable Diffusion Long Throw LED PANEL

Photometric Data:

Without Interchangeable Diffusion Panel

Dispersion Angle X: 45°

2,073 lx (193 fc) @ 6 ft

With Interchangeable Diffusion Panel

Dispersion Angle X: 70°

800 lx (74 fc) @ 6 ft




CineLight Studio 60®



Tunable Interchangeable Diffusion Long Throw LED PANEL with Yoke

Includes:

- **Flightcase with handle and wheels (Dims.: 85.5 x 40.3 x 29.5 cm)**
- **Interchangeable Diffusion Panel**
- **Barndoor**
- **Gel frame**
- **C-Clamp**
- **Safety cable**
- **16 ft long Powercon AC cable without switch**
- **Stand mounting spigot 5/8"**
- **G6LCNT207**

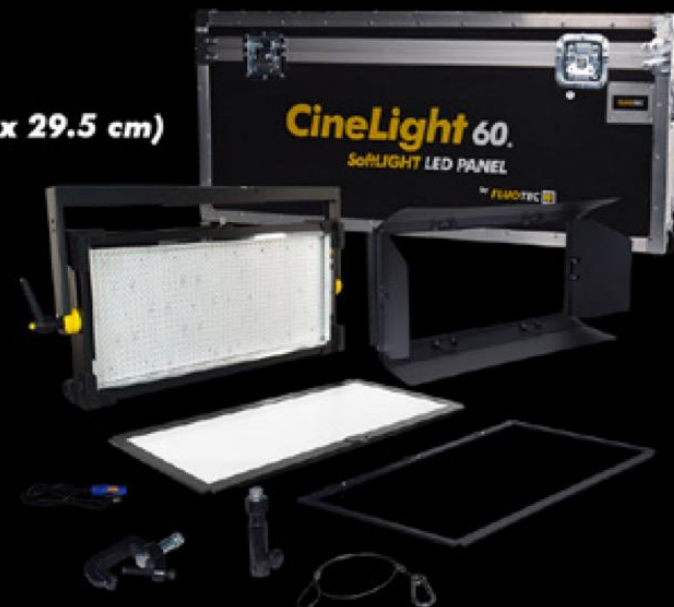


CineLight Studio 60[®]



Tunable Interchangeable Diffusion Long Throw LED PANEL with Stand Mounting Bracket

Includes:

- **Flightcase with handle and wheels (Dims.: 85.5 x 40.3 x 29.5 cm)**
- **Barndoor**
- **Gel frame**
- **Stand Mounting Bracket**
- **16 ft long Powercon AC cable**
- **G6LCNT208**

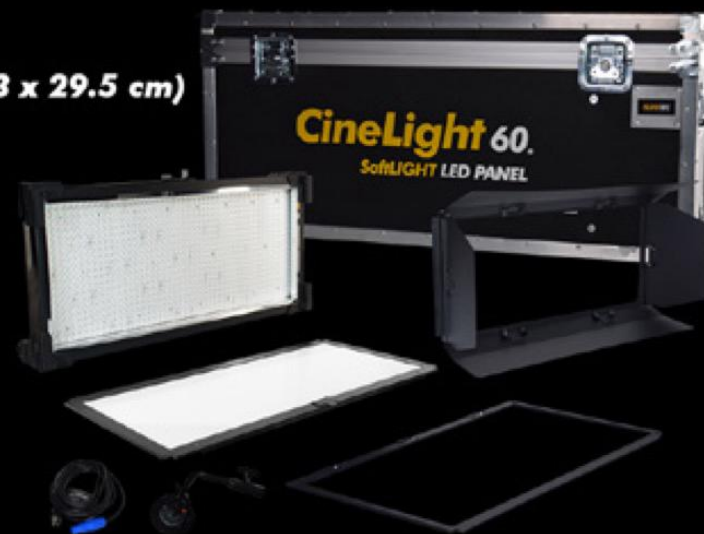

CineLight Studio 30®

Tunable Interchangeable Diffusion Long Throw LED PANEL

- **Tunable**
- **2700K - 6600K**
- **57W**
- **0.48 A @120 VAC**
- **10 lb**
- **Constant Output Pure White Light**
- **Digital Dimmer 0%-100%**
- **Stepless CCT & Dimming Technology**
- **Code AC only: G6LCNT107**
- **Code V-Mount: G6LCNT108**
- **Code Gold-Mount: G6LCNT109**



CineLight Studio 30[®]

Tunable Interchangeable Diffusion Long Throw LED PANEL

Photometric Data:

Without Interchangeable Diffusion Panel


Dispersion Angle X: 45°

1,078 lx (100 fc) @ 6 ft

With Interchangeable Diffusion Panel

Dispersion Angle X: 70°

416 lx (39 fc) @ 6 ft

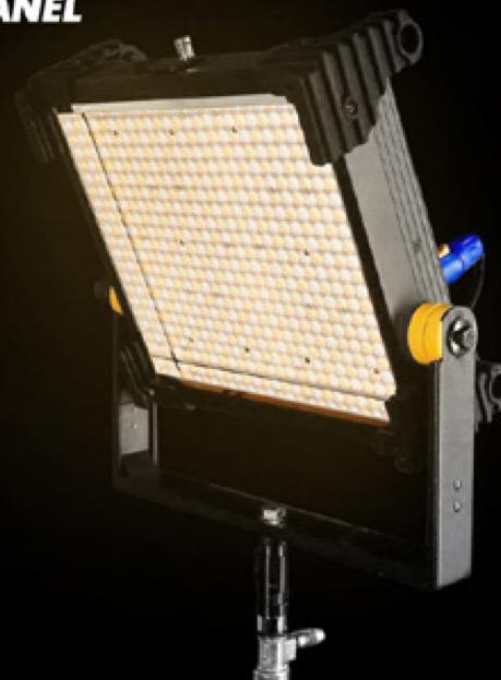

CineLight Studio 30®



Tunable Interchangeable Diffusion Long Throw LED PANEL • V-Mount Battery Plate

Includes:

- **Travelcase with handle and wheels (Dims.: 95.2 x 45 x 22.9 cm)**
- **1 CineLight 30 V-Mount**
- **1 Interchangeable Diffusion Panel**
- **1 Tripod**
- **1 Gel frame**
- **1 16 ft long Powercon AC cable with switch**
- **1 Stand mount spigot mini**
- **G6LCNT172**



CineLight Studio 30[®]



Tunable Interchangeable Diffusion Long Throw LED PANEL • V-Mount Battery Plate

Includes:

- **Travelcase with handle and wheels (Dims.: 95.2 x 45 x 22.9 cm)**
- **2 CineLight 30 V-Mount**
- **2 Interchangeable Diffusion Panels**
- **2 Tripods**
- **2 Gel frames**
- **2 16 ft long Powercon AC cables with switch**
- **2 Stands mount spigot mini**
- **G6LCNT173**



CineLight Studio 30®



Tunable Interchangeable Diffusion Long Throw LED PANEL • V-Mount Battery Plate

Includes:

- 1 Cargo case heavy duty with handle and wheels
(Dims.: 58 x 106 x 19 cm)
- 3 CineLight 30 V-Mount
- 3 Interchangeable Diffusion Panels
- 3 Tripods
- 3 Gel frames
- 3 16 ft long Powercon AC cables with switch
- 3 Stands mount spigot mini
- G6LCNT174



CineLight Studio 30[®]



Tunable Interchangeable Diffusion Long Throw LED PANEL • Gold-Mount Battery Plate

Includes:

- **Travelcase with handle and wheels (Dims.: 95.2 x 45 x 22.9 cm)**
- **1 CineLight 30 Gold-Mount**
- **1 Interchangeable Diffusion Panel**
- **1 Tripod**
- **1 Gel frame**
- **1 50° Egg crate degree light control grid**
- **1 16 ft long Powercon AC cable with switch**
- **1 Stand mount spigot mini**
- **G6LCNT175**



CineLight Studio 30®



Tunable Interchangeable Diffusion Long Throw LED PANEL • Gold-Mount Battery Plate

Includes:

- **Travelcase with handle and wheels (Dims.: 95.2 x 45 x 22.9 cm)**
- **2 CineLight 30 Gold-Mount**
- **2 Interchangeable Diffusion Panels**
- **2 Tripods**
- **2 Gel frames**
- **2 16 ft long Powercon AC cables with switch**
- **2 Stands mount spigot mini**
- **G6LCNT176**



CineLight Studio 30[®]



Tunable Interchangeable Diffusion Long Throw LED PANEL • Gold-Mount Battery Plate

Includes:

- 1 Cargo case heavy duty with handle and wheels (Dims.: 58 x 106 x 19 cm)
- 3 CineLight 30 Gold-Mount
- 3 Interchangeable Diffusion Panels
- 3 Tripods
- 3 Gel frames
- 3 16 ft long Powercon AC cables with switch
- 3 Stands mount spigot mini
- G6LCNT177




CineLight Production 120 **Quad**®



Tunable Fixed Diffusion SoftLIGHT LED PANEL

- **Tunable**
- **2700K - 6600K**
- **213W**
- **1.79 A @120 VAC**
- **24.25 lb**
- **Constant Output Pure White Light**
- **Digital Dimmer 0%-100%**
- **Stepless CCT & Dimming Technology**
- **Code with Yoke: G6LCNT112**
- **Code with Stand Mounting Bracket: G6LCNT114**

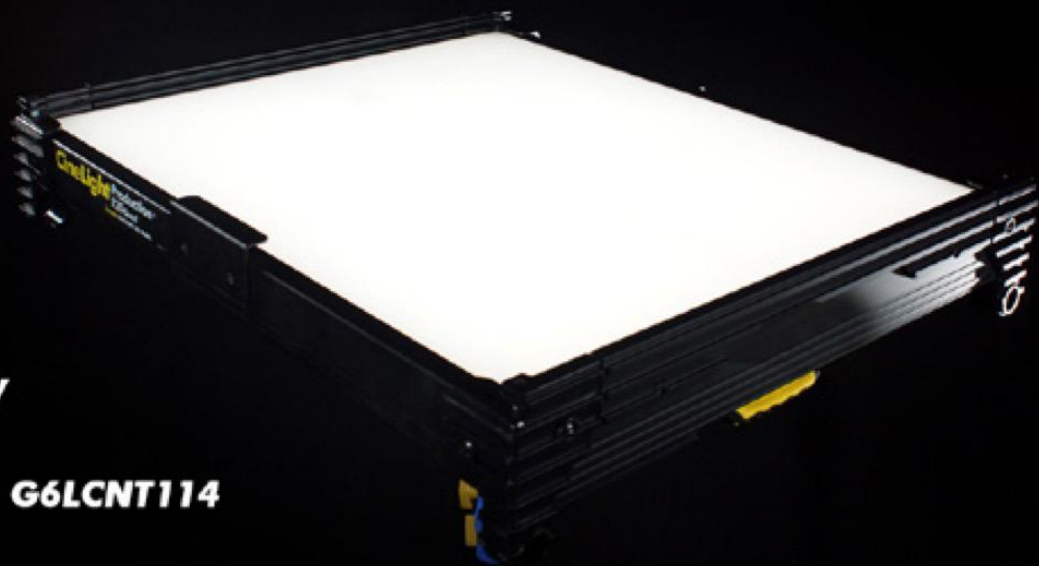

CineLight Production 120 Quad[®]



Tunable Fixed Diffusion SoftLIGHT LED PANEL


Photometric Data:

Dispersion Angle X: 70°

1,500 lx (139 fc) @ 6 ft

669 lx (62 fc) @ 9 ft

375 lx (35 fc) @ 12 ft

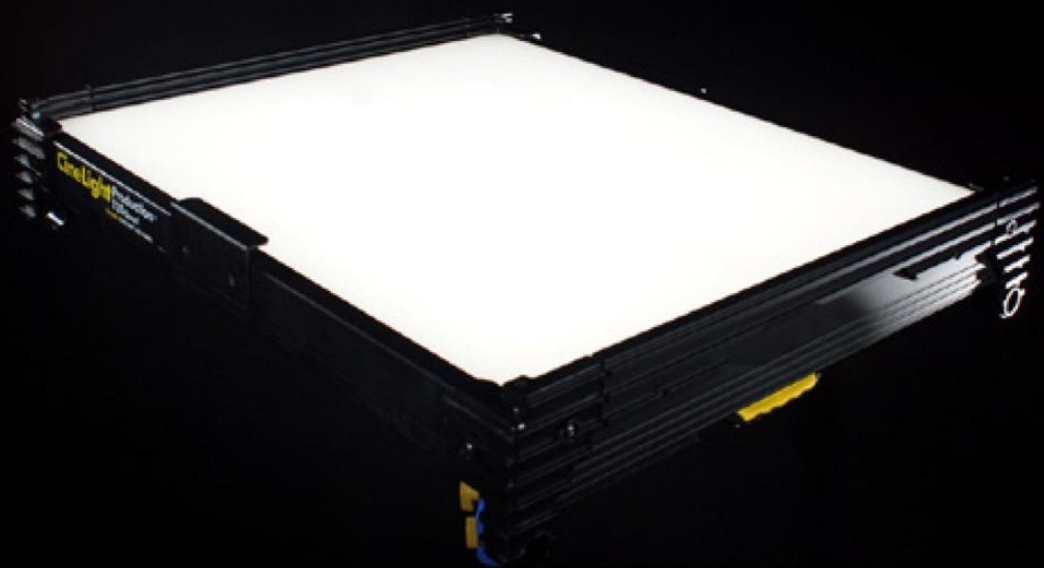

CineLight Production 120 Quad®



Tunable Fixed Diffusion SoftLIGHT LED PANEL with Yoke

Includes:

- **Flightcase with handle and wheels**
- **Gel frame**
- **C-Clamp**
- **Safety cable**
- **16 ft long Powercon AC cable**
- **Stand mounting spigot 5/8"**
- **G6LED201**



CineLight Production 120 Quad[®]



Tunable Fixed Diffusion *SoftLIGHT* LED PANEL with Stand Mounting Bracket

Includes:

- **Flightcase with handle and wheels**
- **Gel frame**
- **Stand Mounting Bracket**
- **16 ft long Powercon AC cable**
- **G6LCNT202**



CineLight **Production 120[®]**

Tunable Fixed Diffusion *SoftLIGHT* LED PANEL

- **Tunable**
- **2700K - 6600K**
- **213W**
- **1.79 A @120 VAC**
- **21.5 lb**
- **Constant Output Pure White Light**
- **Digital Dimmer 0%-100%**
- **Stepless CCT & Dimming Technology**
- **Code with Yoke: G6LCNT100**
- **Code with Stand Mounting Bracket: G6LCNT110**



CineLight **Production 120[®]**

Tunable Fixed Diffusion SoftLIGHT LED PANEL

Photometric Data:

Dispersion Angle X: 70°

1,500 lx (139 fc) @ 6 ft

669 lx (62 fc) @ 9 ft

375 lx (35 fc) @ 12 ft



CineLight Production 120®



Tunable Fixed Diffusion *SoftLIGHT* LED PANEL with Yoke

Includes:

- **Flightcase with handle and wheels (Dims.: 141.3 x 40.3 x 29.5 cm)**
- **Barndoor**
- **Gel frame**
- **50° Egg crate degree light control grid**
- **C-Clamp**
- **Safety cable**
- **16 ft long Powercon AC cable without switch**
- **Stand mounting spigot 5/8"**
- **G6CNT119**



CineLight Production 120®



Tunable Fixed Diffusion *SoftLIGHT* LED PANEL with Stand Mounting Bracket

Includes:


- **Flightcase with handle and wheels (Dims.: 141.3 x 40.3 x 29.5 cm)**
- **Barndoor**
- **Gel frame**
- **50° Egg crate degree light control grid**
- **C-Clamp**
- **Safety cable**
- **16 ft long Powercon AC cable without switch**
- **Stand mounting bracket**
- **G6CNT116**



CineLight **Production 60[®]**

Tunable Fixed Diffusion SoftLIGHT LED PANEL

- **Tunable**
- **2700K - 6600K**
- **109W**
- **0.91 A @120 VAC**
- **15.43 lb**
- **Constant Output Pure White Light**
- **Digital Dimmer 0%-100%**
- **Stepless CCT & Dimming Technology**
- **Code with Yoke: G6LCNT101**
- **Code with Stand Mounting Bracket: G6LCNT111**

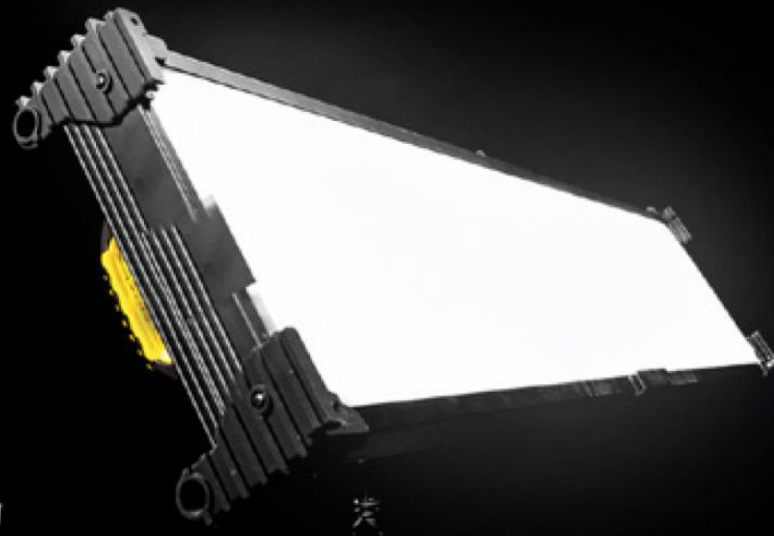

CineLight **Production 60®**

Tunable Fixed Diffusion SoftLIGHT LED PANEL


Photometric Data:

Dispersion Angle X: 70°

800 lx (74 fc) @ 6 ft

357 lx (33 fc) @ 9 ft

200 lx (19 fc) @ 12 ft

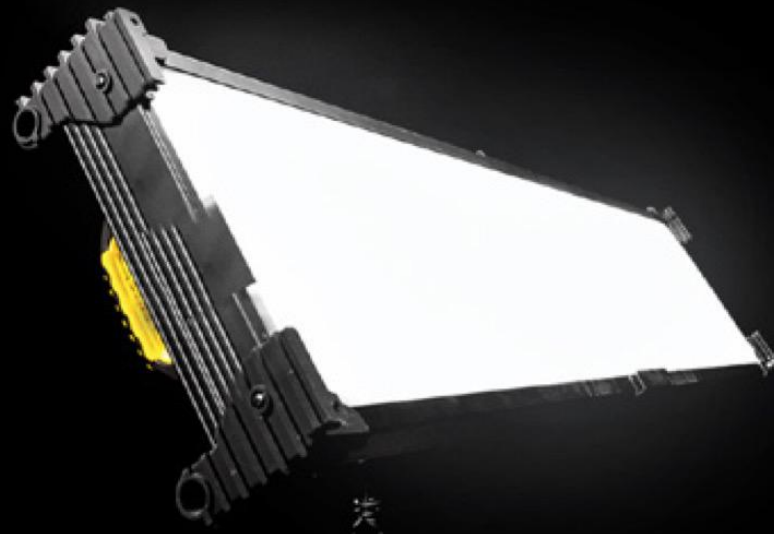

CineLight Production 60®



Tunable Fixed Diffusion *SoftLIGHT* LED PANEL with Yoke

Includes:

- **Flightcase with handle and wheels (Dims.: 85.5 x 40.3 x 29.5 cm)**
- **Barndoor**
- **Gel frame**
- **50° Egg crate degree light control grid**
- **C-Clamp**
- **Safety cable**
- **16 ft long Powercon AC cable**
- **Stand mounting spigot 5/8"**
- **G6CNT120**



CineLight Production 60®



Tunable Fixed Diffusion SoftLIGHT LED PANEL with Stand Mounting Bracket

Includes:

- **Flightcase with handle and wheels (Dims.: 85.5 x 40.3 x 29.5 cm)**
- **Barndoor**
- **Gel frame**
- **50° Egg crate degree light control grid**
- **16 ft long Powercon AC cable without switch**
- **Stand mounting bracket**
- **G6CNT118**



CineLight **Production 30[®]**

Tunable Fixed Diffusion *SoftLIGHT* LED PANEL

- **Tunable**
- **2700K - 6600K**
- **57W**
- **0.48 A @120 VAC**
- **10 lb**
- **Constant Output Pure White Light**
- **Digital Dimmer 0%-100%**
- **Stepless CCT & Dimming Technology**
- **Code AC only: G6LCNT102**
- **Code V-Mount: G6LCNT103**
- **Code Gold-Mount: G6LCNT104**



CineLight

Production 30[®]

Tunable Fixed Diffusion *SoftLIGHT* LED PANEL

Photometric Data:

Dispersion Angle X: 70°

416 lx (39 fc) @ 6 ft

186 lx (17 fc) @ 9 ft

104 lx (10 fc) @ 12 ft



CineLight Production 30[®]



Tunable Fixed Diffusion *SoftLIGHT LED* PANEL • V-Mount Battery Plate

Includes:

- **Travelcase with handle and wheels (Dims.: 95.2 x 45 x 22.9 cm)**
- **1 CineLight 30 V-Mount**
- **1 Tripod**
- **1 Gel frame**
- **1 50° Egg crate degree light control grid**
- **1 16 ft long Powercon AC cable with switch**
- **1 Stand mount spigot mini**
- **G6LCNT163**



CineLight Production 30[®]



Tunable Fixed Diffusion SoftLIGHT LED PANEL • V-Mount Battery Plate

Includes:

- **Travelcase with handle and wheels (Dims.: 95.2 x 45 x 22.9 cm)**
- **2 CineLight 30 V-Mount**
- **2 Tripods**
- **2 Gel frames**
- **2 50° Egg crate degree light control grids**
- **2 16 ft long Powercon AC cables with switch**
- **2 Stands mount spigot mini**
- **G6LCNT164**



CineLight Production 30[®]



Tunable Fixed Diffusion *SoftLIGHT* LED PANEL • V-Mount Battery Plate

Includes:

- 1 Cargo case heavy duty with handle and wheels
(Dims.: 58 x 106 x 19 cm)
- 3 CineLight 30 V-Mount
- 3 Tripods
- 3 Gel frames
- 3 50° Egg crate degree light control grids
- 3 16 ft long Powercon AC cables with switch
- 3 Stands mount spigot mini
- G6LCNT165



CineLight Production 30[®]



Tunable Fixed Diffusion *SoftLIGHT* LED PANEL • Gold-Mount Battery Plate

Includes:

- **Travelcase with handle and wheels (Dims.: 95.2 x 45 x 22.9 cm)**
- **1 CineLight 30 Gold-Mount**
- **1 Tripod**
- **1 Gel frame**
- **1 50° Egg crate degree light control grid**
- **1 16 ft long Powercon AC cable with switch**
- **1 Stand mount spigot mini**
- **G6LCNT166**



CineLight Production 30®



Tunable Fixed Diffusion SoftLIGHT LED PANEL • Gold-Mount Battery Plate

Includes:

- **Travelcase with handle and wheels (Dims.: 95.2 x 45 x 22.9 cm)**
- **2 CineLight 30 Gold-Mount**
- **2 Tripods**
- **2 Gel frames**
- **2 50° Egg crates degree light control grid**
- **2 16 ft long Powercon AC cables with switch**
- **2 Stands mount spigot mini**
- **G6LCNT167**



CineLight Production 30[®]



Tunable Fixed Diffusion *SoftLIGHT* LED PANEL • Gold-Mount Battery Plate

Includes:

- 1 Cargo case heavy duty with handle and wheels
(Dims.: 58 x 106 x 19 cm)
- 3 CineLight 30 Gold-Mount
- 3 Tripods
- 3 Gel frames
- 3 50° Egg crates degree light control grid
- 3 16 ft long Powercon AC cables with switch
- 3 Stands mount spigot mini
- G6LCNT168



StarMaker[®] HP

Tunable Interchangeable Diffusion Full Waterproof LED PANEL

- **Tunable**
- **2700K - 6200K**
- **66W**
- **0.56 A @120 VAC**
- **10.6 lb**
- **Constant Output Pure White Light**
- **Digital Dimmer 0%-100%**
- **Stepless CCT & Dimming Technology**
- **Code V-Mount: G6LED190**
- **Code Gold-Mount: G6LED191**



StarMaker[®] HP

Tunable Interchangeable Diffusion Full Waterproof LED PANEL

Photometric Data:

Dispersion Angle X: 45°

1,360 lx (126 fc) @ 6 ft

607 lx (56 fc) @ 9 ft

340 lx (32 fc) @ 12 ft



StarMaker® HP



Tunable Interchangeable Diffusion Full Waterproof LED PANEL • V-Mount Battery Plate

Includes:

- **Travelcase with handle and wheels (Dims.: 95.2 x 45 x 22.9 cm)**
- **1 StarMaker HP V-Mount**
- **1 Interchangeable Diffusion Panel**
- **1 Tripod**
- **1 Gel frame**
- **1 16 ft long Powercon AC cable with switch**
- **1 Stand mount spigot mini**
- **G6LED192**




StarMaker® HP



Tunable Interchangeable Diffusion Full Waterproof LED PANEL • V-Mount Battery Plate

Includes:

- **Travelcase with handle and wheels (Dims.: 95.2 x 45 x 22.9 cm)**
- **2 StarMaker HP V-Mount**
- **2 Interchangeable Diffusion Panels**
- **2 Tripods**
- **2 Gel frames**
- **2 16 ft long Powercon AC cables with switch**
- **2 Stands mount spigot mini**
- **G6LED193**

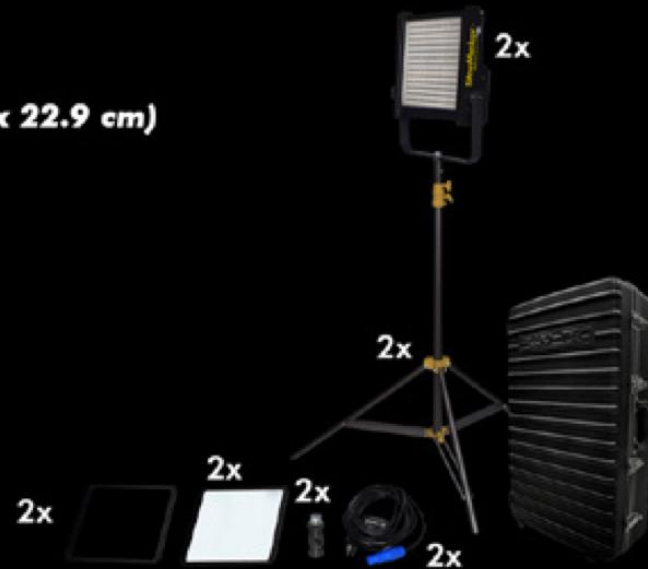


StarMaker® HP



Tunable Interchangeable Diffusion Full Waterproof LED PANEL • V-Mount Battery Plate

Includes:

- **Travelcase with handle and wheels (Dims.: 95.2 x 45 x 22.9 cm)**
- **3 StarMaker HP V-Mount**
- **3 Interchangeable Diffusion Panels**
- **3 Tripods**
- **3 Gel frames**
- **3 16 ft long Powercon AC cables with switch**
- **3 Stands mount spigot mini**
- **G6LED194**

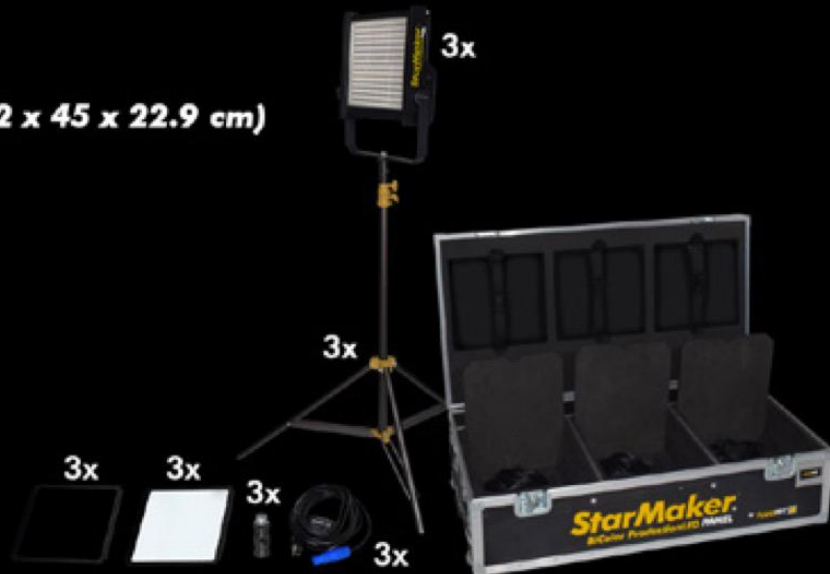

StarMaker® HP



Tunable Interchangeable Diffusion Full Waterproof LED PANEL • Gold-Mount Battery Plate

Includes:

- **Travelcase with handle and wheels (Dims.: 95.2 x 45 x 22.9 cm)**
- **1 StarMaker HP Gold-Mount**
- **1 Interchangeable Diffusion Panel**
- **1 Tripod**
- **1 Gel frame**
- **1 16 ft long Powercon AC cable with switch**
- **1 Stand mount spigot mini**
- **G6LED195**




StarMaker® HP



Tunable Interchangeable Diffusion Full Waterproof LED PANEL • Gold-Mount Battery Plate

Includes:

- **Travelcase with handle and wheels (Dims.: 95.2 x 45 x 22.9 cm)**
- **2 StarMaker HP Gold-Mount**
- **2 Interchangeable Diffusion Panels**
- **2 Tripods**
- **2 Gel frames**
- **2 16 ft long Powercon AC cables with switch**
- **2 Stands mount spigot mini**
- **G6LED196**

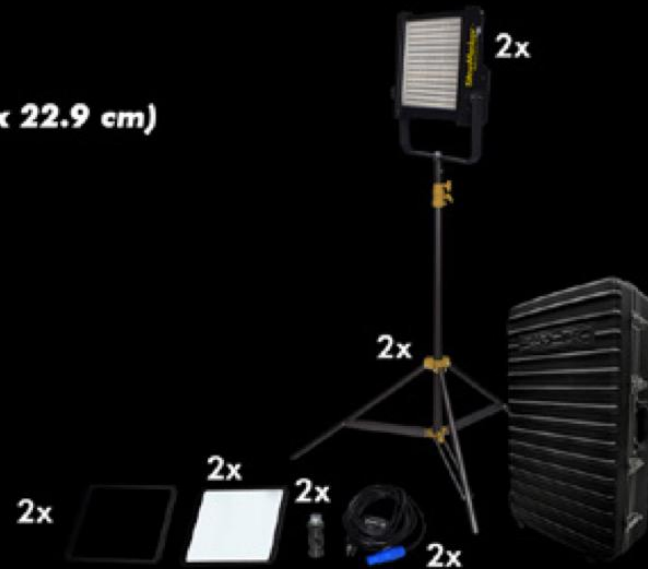


StarMaker® HP



Tunable Interchangeable Diffusion Full Waterproof LED PANEL • Gold-Mount Battery Plate


Includes:

- **Travelcase with handle and wheels (Dims.: 95.2 x 45 x 22.9 cm)**
- **3 StarMaker HP Gold-Mount**
- **3 Interchangeable Diffusion Panels**
- **3 Tripods**
- **3 Gel frames**
- **3 16 ft long Powercon AC cables with switch**
- **3 Stands mount spigot mini**
- **G6LED197**

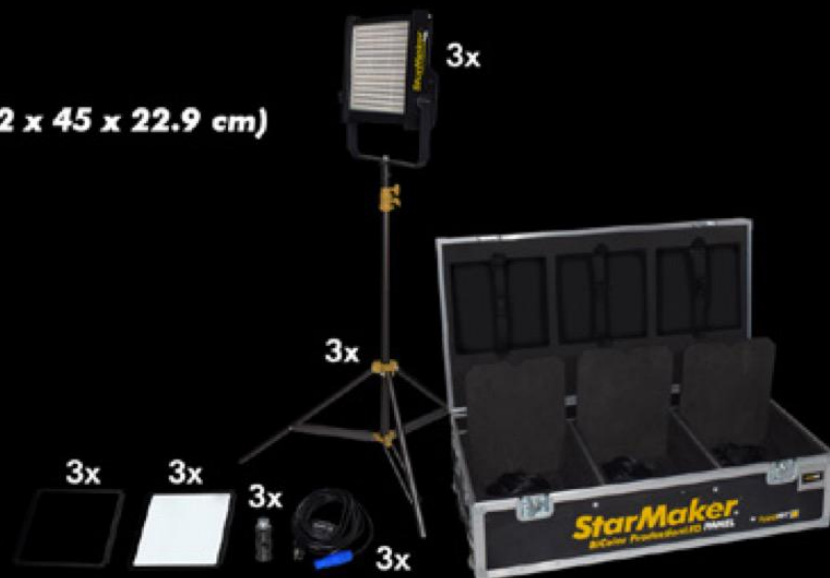

FLUOTEC® leader in design and manufacture of lighting for television, video and photography.

FLUOTEC®

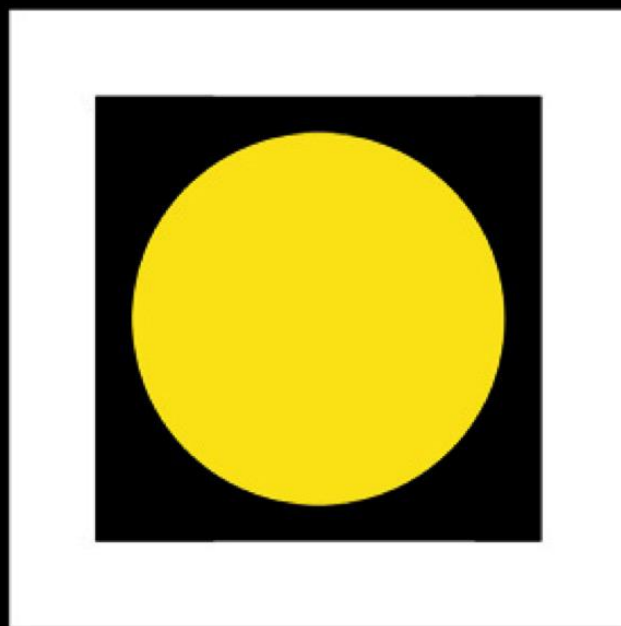

...WE LIGHT!

CONTACT US

Videoservices has open a location in San Antonio TX for our customers convenience. Here they can personally see and try the equipment.

We also provide online workshops, trainings and courses as well as one on one sales consultation with our light experts. Call us to learn more.

If you are interested on buying any of these products or have any questions, please feel free to contact us to arrange a meeting.

We are located at

6460 Randolph Blvd. 2nd Floor, San Antonio, TX 78233

Manuel Horwath - Sales Rep.

manuel@videoservicesint.com
(210) 802-1828

Alberto Garcia - Sales Rep.

info@videoservicesint.com
(210) 473-8217

More info: www.videoservicesint.com